

U.R

U.R

Flexible, versatile and environmentally-friendly...
U.R is the smarter choice.


An environmentally considered table system, U.R draws on Life Cycle Assessments (LCA) to determine the most appropriate materials, and Finite Element Analysis (FEA) to ensure the strongest structure while eliminating waste. Skilfully designed for 100% disassembly, U.R is all ready for recycling.

U.R_TECHNICAL SPECIFICATIONS-20/03/25

Table Finishes

1. Frame Finishes

Standard U.R frame finishes include black or chrome legs with a polished foot. U.R is also available in our current season powdercoat colours listed, with custom colour optional.

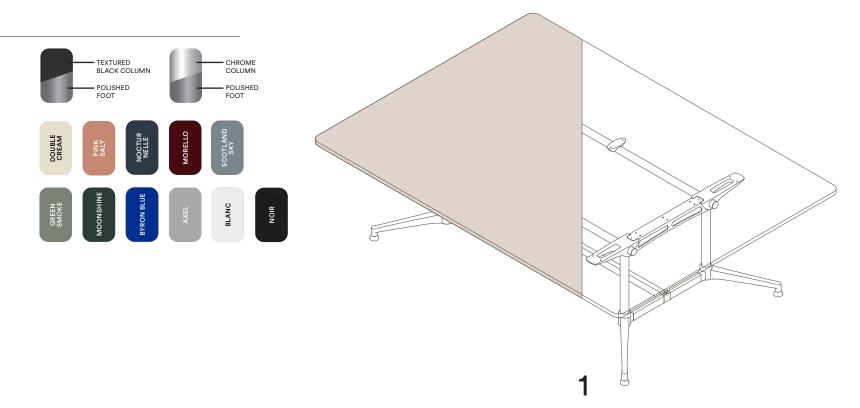

Colours are representative only, please check with your Thinking Works consultant to view samples of any specific colour.

U.R_TECHNICAL SPECIFICATIONS-20/03/25

Tables Rectangle

Materials Information

Leg Finish

Steel Leg Column

- a. Textured Black (standard)
- Chrome (standard)
- c. Blanc
- d. Noir
- e. Double Cream
- Pink Salt
- g. Nocturnelle
- h. Morello
- Scotland Sky
- Green Smoke
- k. Moonshine
- Byron Blue
- m. Axel

Foot Finish

Aluminium Foot

- a. Polished (standard)
- b. Powdercoat (to match column)

Frame Finish

Polished Aluminium Top Horn Steel Black Powdercoat Rails


* Maximum Custom Height 1000mm on Glides 900mm on Castors

Maximum inc. worktop Maximum Point Load Seats 4-6

100kg 50kg


CN-1000, CN-1001, CN-1002


720 (standard Height)















U.R_TECHNICAL SPECIFICATIONS - 20/03/25

Tables Features

Materials Information

Frame Finish

Steel Slingshot

a. Powdercoat (to match frame)

Steel Power/Data Beam

a. Black Powdercoat

Powerbox Slingshot

Suitable for CN-1040 and CN-1041 table frames

Replaces U.R leg column to provide placement of powerboxes without frame interference

Made to order to cater for specified powerbox requirements and size

Provides 75mm clearance around powerbox to ensure fitment without frame interference

Power/Data Beam

Suitable for CN-1000, CN-1001 and CN-1002 frames

Suitable for CN-1010, CN-1011 and CN-1012 frames


Replaces central rail to provide placement of powerboxes without frame interference


Made to order to cater for specified powerbox requirements and size

Provides 50mm clearance around powerbox to ensure fitment without frame interference

Powerbox Management


Slingshot

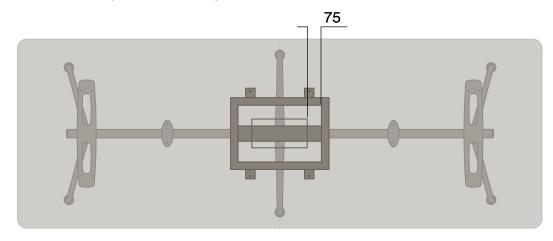




Powerbox Management

Power/Data Beam

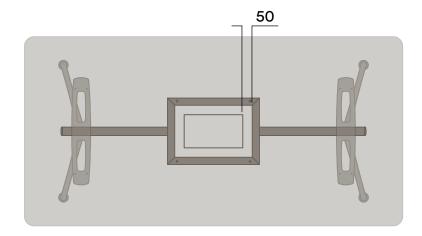



U.R_TECHNICAL SPECIFICATIONS - 20/03/25



Specification

Due to our policy of continuous product development, specifications and finishes may change without prior notice.

Sustainability Policy

We realise the importance of responsible business practices and have in place numerous product and company sustainability certifications. We would encourage you to download our annual Sustainability Report from the Thinking Works website to get a full overview of our sustainability program.

Thinking Works © Copyright 2020 All right reserved



U.R. TECHNICAL SPECIFICATIONS - 20/03/25